


## CEDRAL RIVENDALE FIBRE CEMENT SLATE

## Product Data Sheet

Cedral Rivendale slates are designed to reflect the qualities of natural slate, at a fraction of the cost. Available in blue black or heather, Rivendale slates have a beautifully textured surface and dressed edges, combining the benefit of modern slate technology with the look of a natural slate. With more cement and fibres than any other, all Cedral slates are the strongest slates in the market. They come with a 20-year colour and 30-year structural guarantee.

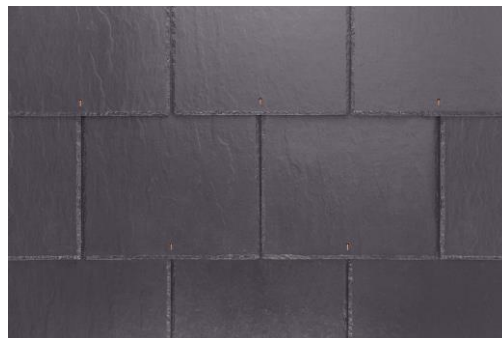

## TECHNICAL DATA

| Size of Slate                                      | 600 x 300mm                                                                                                                            |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Minimum Pitch                                      | 25° (110mm Headlap)                                                                                                                    |
| Max Pitch                                          | 90°                                                                                                                                    |
| Typical Headlaps                                   | 100, 110mm                                                                                                                             |
| Batten Gauge                                       | 245 – 250mm                                                                                                                            |
| Slate Thickness                                    | 4mm                                                                                                                                    |
| Covering Capacity                                  | 13.4 slates/m <sup>2</sup> (100 headlap)<br>13.6 slates/m <sup>2</sup> (110mm headlap)                                                 |
| Weight of Slating (approx)                         | 20.4 kg/m <sup>2</sup> (0.20 kN/m <sup>2</sup> ) at 100mm headlap<br>20.9 kg/m <sup>2</sup> (0.20 kN/m <sup>2</sup> ) at 110mm headlap |
| Battens Required (net)                             | 4.00 (net lin.m/m <sup>2</sup> ) at 100 mm headlap                                                                                     |
| Batten Size Recommended (fixed as per SR82 : 2017) | 50 x 25mm for rafter supports not exceeding 400mm centres<br>50 x 35mm for rafter supports not exceeding 600mm centres                 |
| Fixings                                            | Slate nails (30 x 2.65mm)<br>Copper disc rivets (19mm dia. x 2mm stem)                                                                 |
| Authority                                          | EN 492                                                                                                                                 |
| Colours available                                  | Blue Black, Heather                                                                                                                    |

**Specification:** Cedral Rivendale slates are manufactured to EN492, Type NT, 4.0mm thick Fibre Cement Slates in Ireland, with a nominal average density of 1970kg/m<sup>3</sup>. Rivendale slates have a textured surface with a dressed edge and are offered with a 20 year manufacturer's colour guarantee due to their siliconised painting process and a 30 year structural guarantee. Cedral, as part of Etex Ireland Ltd., is independently certified as meeting requirements of ISO 9001(Quality), ISO 14001 (Environment), ISO 45001 (Safety) and are rated "Excellent" in the BES 6001 Standard for Responsible Sourcing. Environmental Product Declaration and Declaration of Performance available on [cedral.ie](http://cedral.ie)

Publication Date : January 2021

For more information visit [www.cedral.world/en/roofing](http://www.cedral.world/en/roofing) or contact us at [info.europanel@etexgroup.com](mailto:info.europanel@etexgroup.com).